

motion

porcelain stoneware

PRICE STONE

GLOBAL STONE AND TILE PROVIDER

Hi-tech aesthetics together with functional minimalism are the fundamental components of MOTION - porcelain stoneware collection inspired by the dynamic variations of concrete surfaces. A wide range of formats in four colors makes it an essential tool in designing contemporary environments.

  Made in Italy

motion
porcelain stoneware



BIANCO 12"x 24" Rectified





moti

GRIGIO 24"x 48" Rectified

ion

BLANCO 24"x 48" Rectified
NERO 24"x 48" Rectified






BLANCO 24" x 48" Rectified
NERO 24" x 48" Rectified



GRIGIO 24" x 48" Rectified

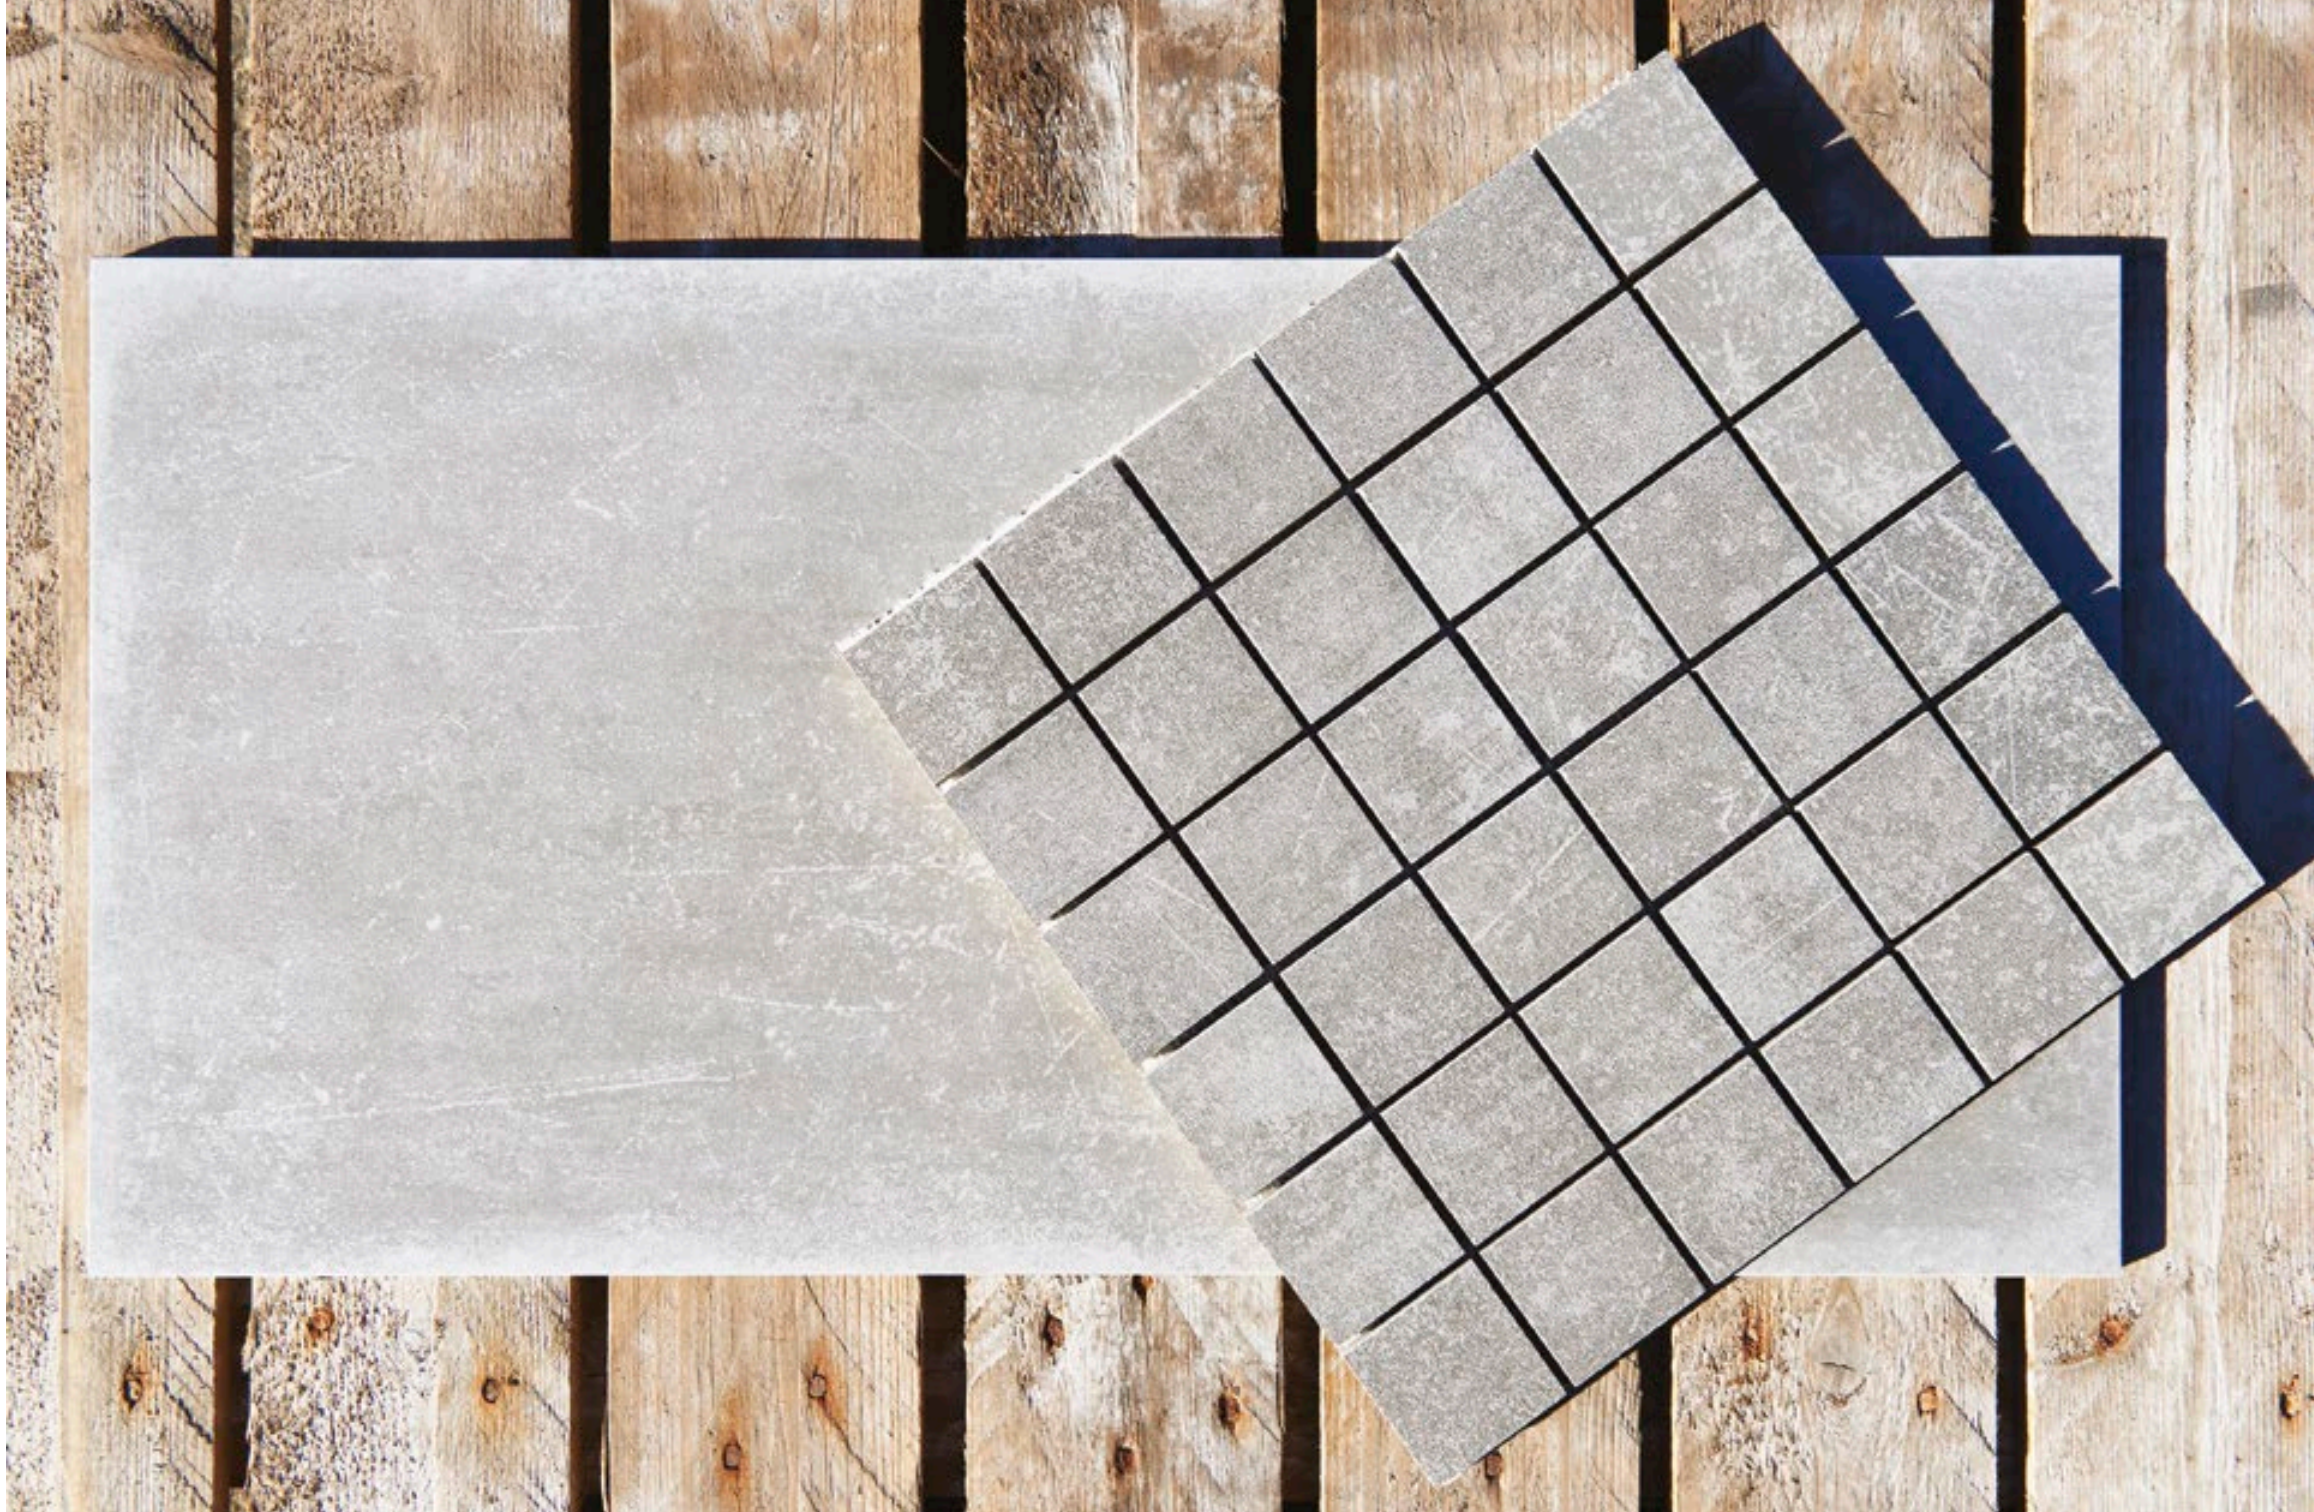

GRIGIO 12"x 24" Rectified
GRIGIO 12"x 12" Mosaic


MARFIL 12"x 24" Rectified
MARFIL 12"x 12" Mosaic




motion Grigio

Colored Body  9 mm  10 mm  RESISTANT  R10 CLASS  HD  V4 RANDOM  R Rectified Porcelain




24" x 24" 





24" x 48" 



12" x 24" 



12" x 48" 




12" x 12" Mosaic (chip size 2" x 2")

Packaging	Box	Pallet
12" x 24"	7 pieces	40 boxes
24" x 24"	4 pieces	30 boxes
12" x 48"	4 pieces	36 boxes
24" x 48"	2 pieces	36 boxes


motion Blanco

Colored Body  9 mm  10 mm  RESISTANT  R10 CLASS  HD  V4 RANDOM  R Rectified Porcelain




24" x 24" 




24" x 48" 



12" x 24" 



12" x 48" 



12" x 12" Mosaic (chip size 2" x 2")


Packaging	Box	Pallet
12" x 24"	7 pieces	40 boxes
24" x 24"	4 pieces	30 boxes
12" x 48"	4 pieces	36 boxes
24" x 48"	2 pieces	36 boxes

motion

Nero

Colored Body  9 mm  10 mm  RESISTANT  R10 CLASS  HD  V4 RANDOM  R Rectified Porcelain




24"x 24" 




24"x 48" 



12"x 24" 



12"x 48" 




12"x 12" Mosaic (chip size 2"x 2")

Packaging	Box	Pallet
12"x 24"	7 pieces	40 boxes
24"x 24"	4 pieces	30 boxes
12"x 48"	4 pieces	36 boxes
24"x 48"	2 pieces	36 boxes

motion Marfil

Colored Body  9 mm  10 mm  RESISTANT  R10 CLASS  HD  V4 RANDOM  R Rectified Porcelain




24" x 24" 



24" x 48" 



12" x 24" 



12" x 48" 



12" x 12" Mosaic (chip size 2" x 2")

Packaging	Box	Pallet
12" x 24"	7 pieces	40 boxes
24" x 24"	4 pieces	30 boxes
12" x 48"	4 pieces	36 boxes
24" x 48"	2 pieces	36 boxes

	CARATTERISTICHE TECNICHE TECHNICAL CHARACTERISTICS CARACTÉRISTIQUES TECHNIQUES TECHNISCHE MERKMALE	NORMA DI RIFERIMENTO REFERENCE STANDARD NORME DE REFERENCE PRÜFMETHODE	VALORE RICHIESTO REQUIRED VALUE VALEUR REQUISE SOLLWERT	VALORE MEDIO TUSCANIA AV. TUSCANIA VALUE VALEUR MOYENNE TUSCANIA MITTLERER TUSCANIA-WERT
	DIMENSIONI DIMENSIONS DIMENSIONS ABMESSUNGEN	ISO 10545-2	CONFORME COMPLIANT CONFORME KONFORM	CONFORME COMPLIANT CONFORME KONFORM
	ASSORBIMENTO D'ACQUA WATER ABSORPTION ABSORPTION D'EAU WASSERAUFNAHME	ISO 10545-3	≤ 0,5 %	CONFORME COMPLIANT CONFORME KONFORM
	RESISTENZA A FLESSIONE MODULUS OF RUPTURE RESISTANCE A LA FLEXION BIEGEFESTIGKEIT	ISO 10545-4	MODULUS OF RUPTURE R ≥ 35 N/MM ² BREAKING STRENGTH S ≥ 1300 N	CONFORME COMPLIANT CONFORME KONFORM
	RESISTENZA ALL'ABRASIONE ABRASION RESISTANCE RÉSISTANCE À L'ABRASION ABRIEBBESTÄNDIGKEIT	ISO 10545-7	PEI SOLO PER PIASTRELLE SMALTATE ONLY FOR GLAZED TILES	PEI IV
	DILATAZIONE TERMICA LINEARE LINEAR THERMAL EXPANSION DILATATION THERMIQUE LINEAIRE LINEARE WÄRMEAUDEHNUNG	ISO 10545-8	≤ 9x10 ⁻⁵ °C ⁻¹	CONFORME COMPLIANT CONFORME KONFORM
	RESISTENZA AGLI SBALZI TERMICI THERMAL SHOCK RESISTANCE RESISTANCE AUX ECARTS DE TEMPERATURE ITEMPERATURWECHSELBESTÄNDIGKEIT	ISO 10545-9	RESISTENTE RESISTANT RESISTANT BESTÄNDIG	RESISTENTE RESISTANT RESISTANT BESTÄNDIG
	RESISTENZA AL GELO FROST RESISTANCE RESISTANCE AU GEL FROSTBESTÄNDIGKEIT	ISO 10545-12	RESISTENTE RESISTANT RESISTANT BESTÄNDIG	RESISTENTE RESISTANT RESISTANT BESTÄNDIG
	RESISTENZA AGLI ACIDI ED ALLE BASI ACID AND ALKALI RESISTANCE RESISTANCE AUX ACIDES ET AUX BASES SÄURE- UND LAUGENBESTÄNDIGKEIT	ISO 10545-13	CLASS GB MIN.	LOW CONCENTRATION GLA HIGH CONCENTRATION GHA
	RESISTENZA ALL'ATTACCO CHIMICO CHEMICAL RESISTANCE RESISTANCE À L'ATTAQUE CHEMIQUE CHEMISCHE BESTÄNDIGKEIT	ISO 10545-13	CLASS GB MIN.	GA
	RESISTENZA ALLE MACCHIE STAIN RESISTANCE RESISTANCE AU TACHES FLECKENBESTÄNDIGKEIT	ISO 10545-14	CLASS 3 MIN.	5
	COEFFICIENTE DI ATTRITO (SCIVOLOSITÀ) FRICTION COEFFICIENT (SLIPPERINESS) COEFFICIENT DE FRICTION (GLISSEMENT) REIBUNGSKOEFFIZIENT (RUTSCHIGKEIT)	BCR - ITALIA DM DEL 14-06-89	DCOF BOT 3000	DIN - GERMANIA DIN 51130
		DRY RUBBER 0.62	WET RUBBER 0.57	DRY LEATHER 0.48
			≥ 0.42 %	R9 ZH 1/571

THE PRODUCTS HAVING AN ABSORPTION < 0,5% ARE CLASSIFIED ACCORDING THE UNI CEN STANDARDS "FULLY VITRIFIED TILES" AND ACCORDING TO THE ASTM STANDARDS "IMPERVIOUS TILES"



Tuscania S.p.A.
Via Giardini Sud, 4603
41028 Serramazzoni (Mo) - Italia

Catalog credits

Photography:
Veronica Benedetti

Room scenes:
Eureka!

Art Direction:
Peter Shleykher

Printed in Italy

The information contained in this catalogue is as accurate as possible, but cannot be considered as legally binding. The Company reserves the right to make any modifications that become necessary due to production requirements. Weight, colours and dimensions are subject to the inevitable variations typical of the ceramic firing process. Colors and aesthetic effects shown on this catalogue should be considered indicative and approximate as a result of printing process limits. Possible variations may occur.





GLOBAL STONE AND TILE PROVIDER

www.pricestone.com